FM2A55M-DGS

AMD A55 FCH (Hudson-D2)

ASRock
www.asrock.com

Compatible with Windows 7

Socket FM2

A10 A8 A6 A4

AMD Radeon HD 7000 Series Graphics

DirectX® 11

AMD Dual Graphics

AMD Steady Video 2.0

AMP & XMP

Dehumidifier

Interactive UEFI

Product Brief

- Support for Socket FM2 100W processors
- Supports Dual Channel DDR3 2400+(OC)
- Supports Intel XMP 1.3/1.2 and AMD Memory Profile
- Supports AMD Dual Graphics
- Built-in AMD Radeon HD 7000 series graphics, DX 11, PS 5.0
- Dual-VGA Output : D-Sub, DVI-D
- 5.1 CH HD Audio (Realtek ALC662 Audio Codec)
- Supports ASRock XFast 555, OMG, Dehumidifier, Easy RAID Installer, Interactive UEFI , AMD Steady Video 2.0
- Free Bundle : CyberLink MediaEspresso 6.5 Trial, ASRock MAGIX Multimedia Suite

Detail Specification

Platform	- Micro ATX Form Factor: 8.9-in x 7.6-in, 22.6 cm x 19.3 cm - Solid Capacitor for CPU power
CPU	- Support for Socket FM2 100W processors - Supports AMD's Cool 'n' Quiet Technology - UMI-Link GEN2
Chipset	- AMD A55 FCH (Hudson-D2)
Memory	- Dual Channel DDR3 memory technology - 2 x DDR3 DIMM slots - Supports DDR3 2400+(OC)/2133(OC)/1866/1600/1333/1066/800 non-ECC, un-buffered memory - Max. capacity of system memory: 16GB - Supports Intel® Extreme Memory Profile (XMP) 1.3 / 1.2 - Supports AMD Memory Profile (AMP)
Expansion Slot	- 1 x PCI Express 2.0 x16 slot (PCIE1 @ x16 mode) - 1 x PCI Express 2.0 x1 slot - 1 x PCI slot - Supports AMD Dual Graphics
Graphics	- AMD Radeon HD 7000 series graphics - DirectX 11, Pixel Shader 5.0 - Max. shared memory 512MB - Dual VGA Output: support DVI and D-Sub ports by independent display controllers - Supports Dual-link DVI with max. resolution up to 2560x1600 @ 75Hz - Supports D-Sub with max. resolution up to 1920x1600 @ 60Hz - Supports AMD Steady Video™ 2.0: New video post processing capability for automatic jutter reduction on home/online video - Supports HDCP function with DVI port - Supports Full HD 1080p Blu-ray (BD) / HD-DVD playback with DVI port
Audio	- 5.1 CH HD Audio (Realtek ALC662 Audio Codec)
LAN	- PCIE x1 Gigabit LAN 10/100/1000 Mb/s - Realtek RTL8111E - Supports Wake-On-LAN - Supports LAN Cable Detection - Supports Energy Efficient Ethernet 802.3az - Supports PXE
Rear Panel I/O	I/O Panel - 1 x PS/2 Mouse/Keyboard Port - 1 x D-Sub Port - 1 x DVI-D Port - 4 x Ready-to-Use USB 2.0 Ports - 1 x RJ-45 LAN Port with LED (ACT/LINK LED and SPEED LED) - HD Audio Jack: Line in / Front Speaker / Microphone
Connector	- 6 x SATA2 3.0 Gb/s connectors, support RAID (RAID 0, RAID 1 and RAID 10), NCQ, AHCI and "Hot Plug" functions - 1 x IR header - 1 x CIR header - 1 x Print port header - 1 x COM port header - 1 x CPU Fan connector (4-pin) - 1 x Chassis Fan connector (4-pin) - 1 x Power Fan connector (3-pin) - 24 pin ATX power connector - 4 pin 12V power connector - Front panel audio connector - 3 x USB 2.0 headers (support 6 USB 2.0 ports)
BIOS Feature	- 64Mb AMI UEFI Legal BIOS with GUI support - Supports "Plug and Play" - ACPI 1.1 Compliance Wake Up Events - Supports jumperfree - SMBIOS 2.3.1 Support - DRAM, VDDP, VDDR, SB Voltage Multi-adjustment
Support CD	- Drivers, Utilities, AntiVirus Software (Trial Version), AMD Live! Explorer, CyberLink MediaEspresso 6.5 Trial, ASRock MAGIX Multimedia Suite - OEM
Unique Feature	- ASRock Extreme Tuning Utility (AXTU) - ASRock Instant Boot - ASRock Instant Flash - ASRock APP Charger - ASRock XFast USB - ASRock XFast LAN - ASRock XFast RAM - ASRock Crashless BIOS - ASRock OMG (Online Management Guard) - ASRock Internet Flash - ASRock UEFI System Browser - ASRock Dehumidifier Function - ASRock Easy RAID Installer - ASRock Interactive UEFI - Hybrid Booster: - ASRock U-COP
Hardware Monitor	- CPU Temperature Sensing - Chassis Temperature Sensing - CPU/Chassis/Power Fan Tachometer - CPU/Chassis Quiet Fan - CPU/Chassis Fan Multi-Speed Control - Voltage Monitoring: +12V, +5V, +3.3V, Vcore
OS	- Microsoft® Windows® 7 / 7 64-bit / Vista™ / Vista™ 64-bit / XP compliant
Certifications	- FCC, CE, WHQL - ErP/EuP Ready (ErP/EuP ready power supply is required)
Accessories	- Quick Installation Guide, Support CD, I/O Shield - 2 x SATA data cables

The specification is subject to change without notice. The brand and product names are trademarks of their respective companies. Any configuration other than original product specification is not guaranteed.

FM2A55M-DGS

AMD A55 FCH (Hudson-D2)

ASRock
www.asrock.com

XFast RAM — Fully Optimize Memory Usage

XFast LAN — Faster Internet Access

XFast USB — Boosts up your USB speed

5X Faster for Photoshop Execution

XFast RAM will create a virtual disk from the system memory to boost the performance. For Photoshop, it can even perform 5X faster than before.



XFast LAN can lower latency in the game after setting online game priority higher.

Time latency in World of Warcraft: Cataclysm
*Lower is better
ASRock Motherboard with XFast LAN
Other Motherboard without XFast LAN



ATTO Disk Benchmark 4K Read
ASRock Motherboard with XFast USB
Other Motherboard without XFast USB

● The performance boost percentage may vary with a different configuration.

DDR3 2400+ Support

The World's Fastest FM2 Sockt-based A55 Motherboard With DDR3 2400+ Support

ASRock FM2A55M-DGS MB
DDR3 2400+

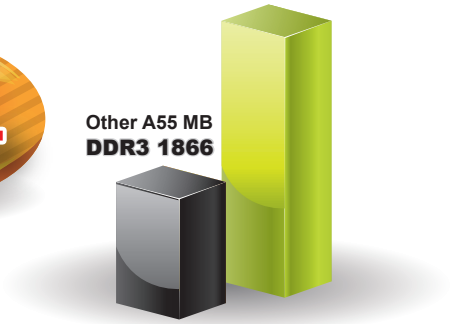

AMD Radeon HD 7000 Series Graphics

Engineered for supremacy, designed for efficiency and packed with incredible features, the AMD Radeon HD 7000 Series offers the world's most advanced graphics.



DirectX® 11

DirectX® 11 is the very latest in high-speed, high-fidelity gaming and computing. It can enable not just more visually stunning games, but significant performance improvements in some of your favorite websites and everyday applications.

AMD Dual Graphics

The AMD Dual Graphics technology combines APU and GPU computing power to optimize user's visual experience.



AMD Steady Video 2.0

Bringing the best video experience! Compared to v1.0, AMD Steady Video 2.0 provides more tech advances such as Letter/Pillar Boxed Content, Indicator Overlay, Enhanced Algorithm Effectiveness, etc.

AMP & XMP

Not only supporting AMD Memory Profile (AMP), ASRock FM2 Motherboard Series also come with Intel XMP memory tuning kits, making it's easy to get maximum memory performance from your system.

Interactive UEFI

ASRock Interactive UEFI is a blend of system configuration tools, cool sound effects and stunning visuals. The unprecedented UEFI provides a more attractive interface and brings a lot more amusing.

ASRock Dehumidifier

Users may prevent motherboard damages due to dampness by enabling "Dehumidifier Function". When enabling Dehumidifier Function, the computer will power on automatically to dehumidify the system after entering S4/S5 state.

ASRock OMG (Online Management Guard)

Fast, Easy and Free – ASRock OMG technology allows you to establish an internet curfew or restrict internet access at specified times. Administrators are able to schedule the starting and ending hours of internet access granted to other users.

The specification is subject to change without notice. The brand and product names are trademarks of their respective companies. Any configuration other than original product specification is not guaranteed.

FM2A55M-DGS

AMD A55 FCH (Hudson-D2)

www.asrock.com

Internet Flash

Internet Flash searches for available UEFI firmware updates from ASRock servers. System can auto-detect the latest UEFI from our servers and flash them within UEFI setup without entering Windows ® OS.

Easy RAID Installer

Easy RAID Installer can help you install the RAID driver easily without floppy drive. It can copy the RAID driver from a support CD to your USB storage device with just one simple click in UEFI setup.



Cyberlink MediaEspresso 6.5 Trial

CyberLink MediaEspresso 6.5 trial supports hardware transcoding and is optimized to accelerate conversion of all your favorite media files for your favorite portable players.

MAGIX Multimedia Suite

The ultimate solutions to enhance your media experience. From music management, music creation, video editing to photo management. Simply do more with your media than you ever thought possible.

The specification is subject to change without notice. The brand and product names are trademarks of their respective companies. Any configuration other than original product specification is not guaranteed.